
Mendota DXV Direct Vent Gas Fireplace Specifications:



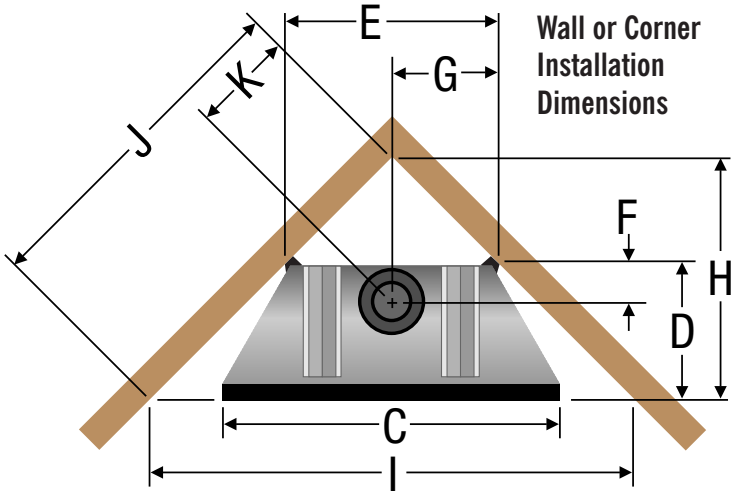

	DXV 35	DXV 42	DXV 45	DXV 60
A	29"	31 1/4"	34"	36 1/16"
B	31 1/2"	31 3/4"	38 1/8"	41"
C	35 7/8"	40"	40"	46 3/8"
D	15 1/2"	15 1/2"	19 1/2"	21 3/4"
E	22 1/4"	33"	34 5/8"	39 1/4"
F	4 5/8"	5 1/2"	7 7/8"	7 1/16"
G	11 1/8"	16 1/2"	17 5/16"	19 5/8"
H	26 1/4"	31 3/4"	36 3/8"	40 15/16"
I	52 17/32"	63 1/2"	72 3/4"	81 7/8"
J	37 1/8"	45 3/4"	51 1/2"	57 7/8"
K	11"	15 1/2"	17 1/4"	18 5/8

Specifications:

BTUH:
DXV 35DTII - Hi 33,000 Lo 13,400
DXV 35T - Hi 33,000 Lo 15,000
DXV 42 - Hi 40,000 Lo 20,000
DXV 45 - Hi 45,000 Lo 7,500
DXV 60 - Hi 60,000 Lo 10,000

Efficiency: ....Thermal up to 86.4%
AFUE up to 73.4%

Gas Supply: ....Natural or LP

Vent Size......................DXV 60, 45 - 5” x 8”
35T rear, 35DT rear - 5” x 8”
DXV 42, DXV 35 TF - 4” x 6”

Pilot System: ....Standing Pilot

Safety Controls:......................AGA Certified

Safety Tested: ....Warnock Hersey
to AGA/ANSI Std.

Shipping Weight: ....DXV 35 - 185 lbs.
DXV 42 - 220 lbs.
DXV 45 - 250 lbs.
DXV 60 - 275 lbs.

Minimum Framing Dimensions:

DXV 35: 31 1/2"H x 37 1/8"W x 16"D

DXV 42: 33"H x 41"W x 16"D

DXV 45: 38 1/8"H x 41"W x 20"D

DXV 60: 41"H x 48"W x 22"D

Standard Equipment:

Fiberglo log set, coals,
DXV 35TF & 42: 2-level burner;
DXV 35DT & DXV 45: 3-level burner;
DXV 60: 3-level burner.
Blower with rheostat, firebrick,
neo-ceram glass, thermostat.

Options:

Black, Cast, Copper, Nickel, Silver, Brass, and 24K Gold fronts, wall switch, remote control, Versiheat.

Consult your Owners Manual for all final dimensions.
Products, specifications, and prices subject to change without notice.
Mendota products are manufactured in the U.S.A

Warnock Hersey